

BE2067

1.2067 / 102Cr6

SAE 52100 / AISI L3 / SUJ 2

Tool Steel

Richtanalyse / Chemical Analysis (in %)


C	Si	Mn	Cr					
1,00	0,25	0,30	1,50					

Wärmebehandlung / Heat Treatment

Austenitisierungstemperatur / Austenitizing Temperature: 820-860° C / 1510-1580° F

Abschreckmedium / Quenching Medium: Öl / Oil

Anlassen / Annealing (Tempering):

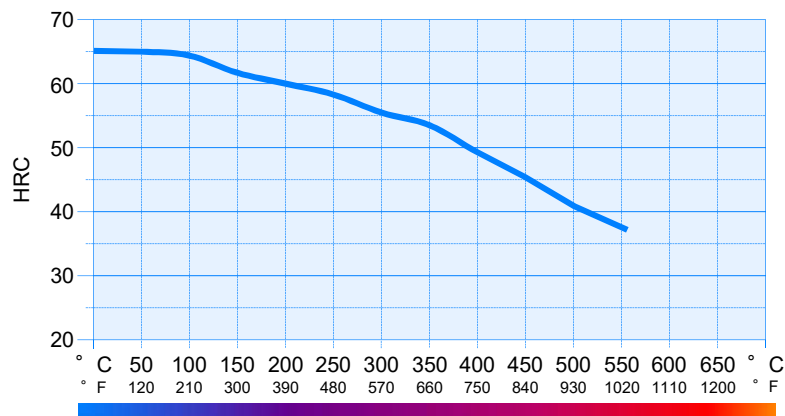

Liefermöglichkeiten / Delivery Options

- Mittelband
- Bleche
- Ronden
- Flachstab
- Rundstab
- Hot Rolled Narrow Strip
- Sheets
- Discs
- Flat Bar
- Round Bar