

BE2519

1.2519 / 110WCrV5

Tool Steel

Richtanalyse / Chemical Analysis (in %)


C	Si	Mn	Cr	Mo	V	W		
1,10	0,25	0,30	1,20		0,20	1,30		

Wärmebehandlung / Heat Treatment

Austenitisierungstemperatur / Austenitizing Temperature: 800-830° C / 1475-1525° F

Abschreckmedium / Quenching Medium: Öl / Oil

Anlassen / Annealing (Tempering):

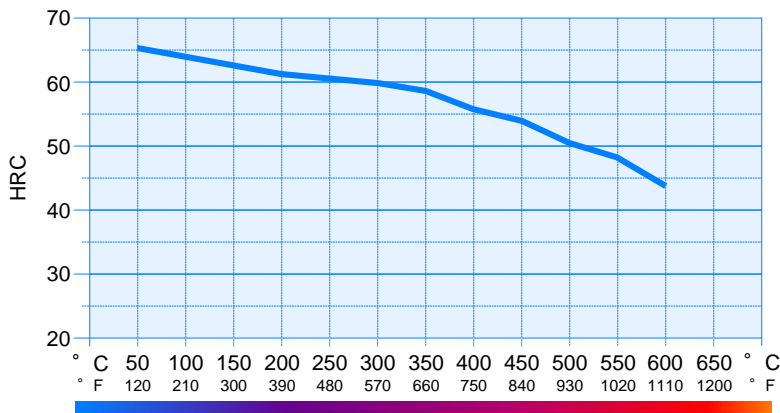

Liefermöglichkeiten / Delivery Options

- Mittelband
- Bleche
- Ronden
- Flachstab
- Rundstab
- Hot Rolled Narrow Strip
- Sheets
- Discs
- Flat Bar
- Round Bar